


NOTES:

1. DESIRED WATTAGE IS SELECTED BY WIRING BETWEEN DESIRED TAP AND TERMINAL C.
2. FOR PROPER SUPERVISION EACH TERMINAL REQUIRES "IN" AND "OUT" CONNECTION.

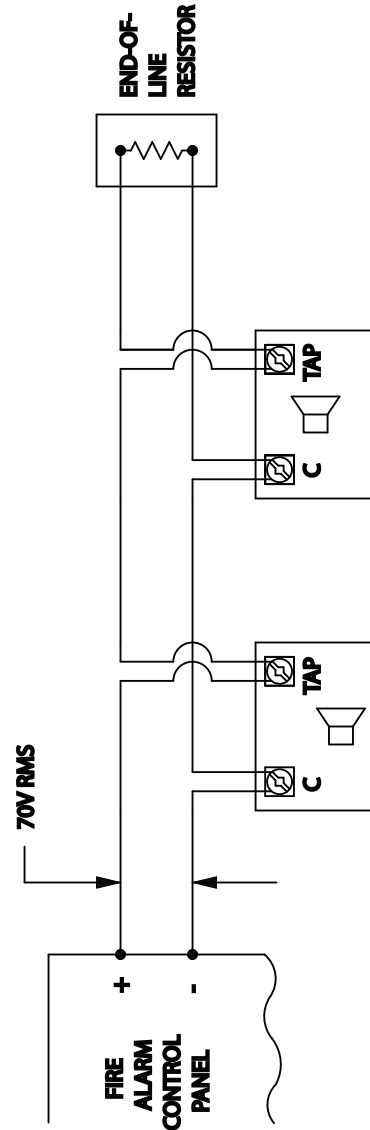

CONE SPEAKERS

	8" SPEAKER CIRCUIT DIAGRAM FOR SP-108-70, SP-208-70 SP-108-25, SP-208-25		DRAWN: W.D.R. 23DEC1999 APPROVED:	DWG.: LT-675
	TITLE	SHEET 1 OF 1	REV. 1	